



**Technical Data Sheet**

Date of issue: 12.08.2020  
 Date of update: 23.08.2023  
 Version: 2







**FINISHING GLAZE**

P/N: 64712 500 g

**Product overview:**

FINISHING GLAZE is intended for final polishing of all types of car paints. Eliminates wear marks and defects after sanding with P2500-P3000 grit sandpaper. Used with soft polishing sponges, it guarantees a perfect, long-lasting gloss without holograms. Especially recommended as the last stage of polishing on dark colors.

**Instructions for use:**

					
1. Degrease the Surface with a remover.	2. Shake well before use.	3. Apply small amount of product on a polishing pad (e.g. Novol Plus SOFT, P/N: 63804) or on the element to be polished.	4. At minimum speed, spread the POLISHING GLAZE over the entire surface to be polished.	5. Polish slowly up to a maximum of 1600 rpm. Working with light pressure, polish the surface until the desired effect is achieved.	6. Remove the remains of the glaze with a microfiber cloth. Any dirt or residues of the product can be removed with water and detergent.

**Characteristics:**

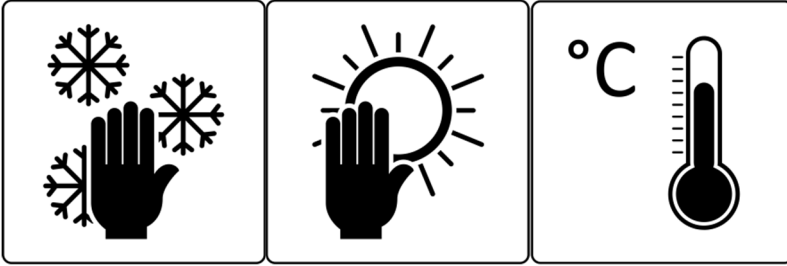
- Does not contain silicone or solvents
- Perfect for both rotary and orbital (Dual Action) polishers
- Recommended use with NOVOL PLUS SOFT (velcro P/N: 63804) or NOVOL SOFT (velcro P/N: 90617 or M14 thread P/N: 39820) polishing pads
- Leaves a lasting shine without holograms

**Note:**

The effectiveness of our systems results from laboratory research and many years of experience. The data contained herein meets the current knowledge about our products and their application potential. We ensure high quality, provided the user follows the instructions and the work is performed in accordance with good workmanship. It is necessary to perform a test application of the product due to its potentially different reaction with different materials. We cannot be held liable for defects where the final results were affected by factors beyond our control. NOVOL reserves the right to improve the product and modify the technical requirements, which may entail modification of the specification. This product is not hazardous if used as intended.

**Technical data:**

	Value
Type of substance, consistency:	thick liquid containing delicate abrasive microparticles
Colour:	white
Density:	1,01 kg/l
Cutting force:	4/10
Gloss level:	10/10
Recommended working temperature:	15 - 25°C
Net weight:	500 g
No. of units in a carton box:	6 units x 500 g

**Shelf life; storage and application requirements:**

Store in a dry and well-ventilated place at 0°C - 45°C. Protect against frost, direct sunlight and heating. The product retains its best properties for 24 months from the date of production, provided that it is stored in accordance with the manufacturer's instructions.

**Note:**

The effectiveness of our systems results from laboratory research and many years of experience. The data contained herein meets the current knowledge about our products and their application potential. We ensure high quality, provided the user follows the instructions and the work is performed in accordance with good workmanship. It is necessary to perform a test application of the product due to its potentially different reaction with different materials. We cannot be held liable for defects where the final results were affected by factors beyond our control. NOVOL reserves the right to improve the product and modify the technical requirements, which may entail modification of the specification. This product is not hazardous if used as intended.