



Technical Data Sheet

Date of issue: 13/12/2021
Date of update: 13/12/2021
Version: 1

SCUFF & MATT PASTE

P/N: 91380 (SAP No. 300009904) 500 g
91379 (SAP No. 300009905) 1 kg

Product overview:

The Scuff & Matt Paste helps with easy and quick preprocessing of the substrate before the application of decorative spray coats. The product has a cleaning and matting action which promotes substrate adhesion. The product facilitates preprocessing of substrates for spray coating, especially in fade-out areas of basecoats, clearcoats, and topcoats. The product improves the finish and favours a uniform appearance of the coated surface.

Instructions for use:

<p>1. Shake before use</p>	<p>2. Apply a small amount of the Scuff & Matt Paste on the Novol scuff pad (e.g. the grey Ultra Fine scuff pad P/N 39526) wet with a small amount of water.</p>	<p>3. Mat down the workpiece surface with the scuff pad until a uniform matt effect is obtained.</p>	<p>4. Remove paste residue using a sponge and warm water.</p>	<p>5. Degrease the substrate with a W785 and 785/780 degreaser. The workpiece is ready for coating.</p>

Characteristics:

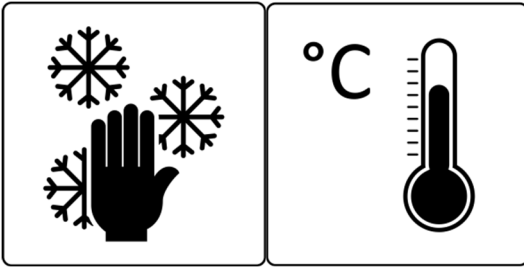
- Evenly mats and cleans the substrate;
- Speeds up and simplifies substrate preprocessing for spray coating;
- Environmentally neutral and silicone-free;
- For water-borne and solvent coating products;
- To be applied with the NOVOL scuff pads;

Note:

The effectiveness of our systems results from laboratory research and many years of experience. The data contained herein meets the current knowledge about our products and their application potential. We ensure high quality, provided the user follows the instructions and the work is performed in accordance with good workmanship. It is necessary to perform a test application of the product due to its potentially different reaction with different materials. We cannot be held liable for defects where the final results were affected by factors beyond our control. NOVOL reserves the right to improve the product and modify the technical requirements, which may entail modification of the specification. This product is not hazardous if used as intended.

**Technical data:**

	Value
Substance type:	Paste with cleaning compounds and abrasive micro grit
Colour:	grey
VOC:	12 g/l
Ignition temperature:	>65°C
Net weight:	500 g or 1000 g
Quantity in bulk packaging:	12 pcs. x 500 g or 6 pcs. x 1000 g

Shelf life; storage and application requirements:

Keep in a dry, well ventilated place between +5°C and +25°C. Keep from freezing. The product will perform best for 24 months from the production date if stored as recommended by the manufacturer.

Note:

The effectiveness of our systems results from laboratory research and many years of experience. The data contained herein meets the current knowledge about our products and their application potential. We ensure high quality, provided the user follows the instructions and the work is performed in accordance with good workmanship. It is necessary to perform a test application of the product due to its potentially different reaction with different materials. We cannot be held liable for defects where the final results were affected by factors beyond our control. NOVOL reserves the right to improve the product and modify the technical requirements, which may entail modification of the specification. This product is not hazardous if used as intended.

NOVOL Sp. z o.o., ul. Żabikowska 7/9, PL62-052 Komorniki, tel. +48 61 810 98 00, novol.com